

DIN 376

HSSE
code 184 XXX



HSSE TiN
code 187 XXX

Strojní závitníky - broušený
se šroubovitými drážkami 35°

Machine taps - grounded
with spiral flute 35°

**Maschinen-Gewinde-
bohrer** - geschliffen
mit Rechtsspiralnute 35°

Механические метчики
- шлифованные с винтовыми дорожками 35°

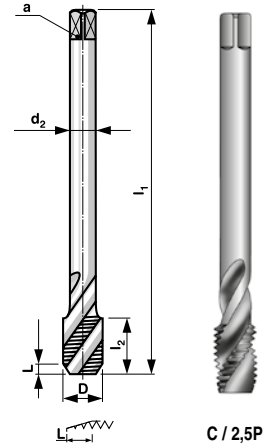

C / 2,5P

M
Metrický závit
Standard metric thread
Metrische Regelgewinde
Метрическая резьба

Lícování: ISO2 (6H) / Tolerance: ISO2 (6H) /
Toleranz: ISO2 (6H) / Подгонка: ISO2 (6H)

D	P	l ₁	l ₂	d ₂	a		code HSSE	code HSSE TiN
M 12	1,75	110	28	9,0	7,0	10,20	184 120	187 120
M 14	2	110	30	11,0	9,0	12,00	184 140	187 140
M 16	2	110	32	12,0	9,0	14,00	184 160	187 160
M 20	2,5	140	34	16,0	12,0	17,50	184 200	187 200

Materiál: HSSE; HSSE TiN
Provedení: broušený závit
Závit: pravý



Material: HSSE; HSSE TiN
Execution: ground thread
Thread: right-hand

Werkstoff: HSSE; HSSE TiN
Ausführung: geschliffenes
Gewinde
Gewinde: rechts

Material: HSSE; HSSE TiN
Изготовлено: шлифованная
резьба
Резьба: правая

HSS

Kombinovaný závitník
Combination taps
Kombiniert
Gewindebohrer
Комбинируемый
метчик

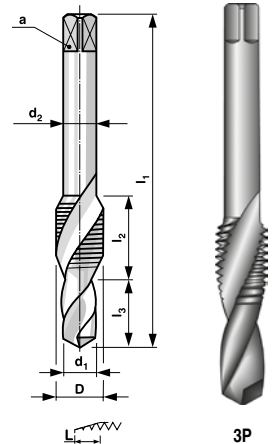

3P

M
Metrický závit
Standard metric thread
Metrische Regelgewinde
Метрическая резьба

Lícování: 2N / Tolerance: 2N /
Toleranz: 2N / Подгонка: 2N

D	P	l ₁	l ₂	l ₃	d ₁	d ₂	a	code
M 4	0,7	50	13	10	3,3	4	3	133 040
M 5	0,8	56	15	12	4,2	5	3,8	133 050
M 6	1	64	17	14	5	6	4,9	133 060
M 8	1,25	72	12	20	6,8	8	6,2	133 080
M 10	1,5	80	14	22	8,5	10	8	133 100
M 12	1,75	90	16	25	10,25	12	9	133 120

Materiál: HSS
Provedení: nebroušený závit
Závit: pravý

Material: HSS
Execution: non-ground thread
Thread: right-hand

Werkstoff: HSS
Ausführung: nicht
geschliffenes Gewinde
Gewinde: rechts

Material: HSS
Изготовлено:
нешлифованная резьба
Резьба: правая

**BUČOVICE
TOOLS a.s.**