


# MMA WELDER



- MMA & LIFT TIG function
- User-friendly control panel with LCD display
- Synergy welding system material thickness, electrode diameter and welding current
- Adjustable HOT START and ARC FORCE control, ANTI STICK
- Complete accessories-electrode earth clamp with cable,mask and brush
- Built in VRD
- Single phase fan - cooled inverter MMA

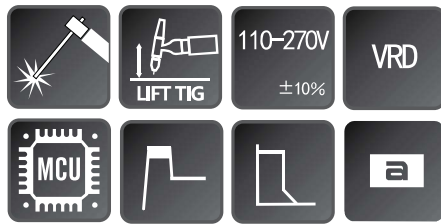

Earth clamp



Electrode holder



Mask and brush



## Product Parameters

MODEL	VARIN 1605 LCD	VARIN 1805 LCD	VARIN 2005 LCD CEL GEN
DV code	606965	606966	606967
Connecting power (V)	230±10%	230±10%	230±10%
Frequency (Hz)	50/60	50/60	50/60
Rated Input Current (A)	25% @ 160A	20% @ 180A	15% @ 200A
Rated Duty Cycle	82V	82V	82V
No Load Voltage U <sub>o</sub>	10 - 160	10 - 180	10 - 200
Output Current Range (A)	10 - 160	10 - 180	10 - 200
Efficiency (%)	≥85	≥85	≥85
Idle state consumption	18 W	18 W	18 W
Welding current regulation	Continuously	Continuously	Continuously
IP rating	IP21S	IP21S	IP21S
Insulation class	H	H	H
Electrode Size (mm) /MMA	1.6~3,25	1.6~4.0	1.6~5.0
Cooling Type	AF	AF	AF
Product size (mm)	355x120x218	355x120x218	355x120x218
Shipping size (mm)	430x185x360	430x185x360	430x185x360
Net Weight (kg)	5kg	5kg	5kg
Suitable for	Hobby	Hobby and Workshop	Hobby and Workshop