

PN 8/3044

HSSE
code 164 XXX



HSSE TiN
code 167 XXX

Strojní závitníky - broušený
se šroubovitými drážkami 35°

Machine taps - grounded
with spiral flute 35°

**Maschinen-Gewinde-
bohrer** - geschliffen mit
Rechtsspiralnute 35°

Механические метчики
- шлифованные винтовыми дорожками 35°

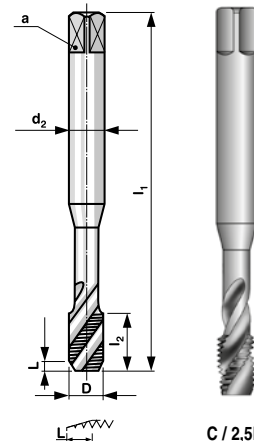

M Metrický závit
Standard metric thread
Metrische Regelgewinde
Метрическая резьба

Lícování: ISO1 / Tolerance: ISO1 /
Toleranz: ISO1 / Подгонка: ISO1

D	P	l ₁	l ₂	d ₂	a		code HSSE	code HSSE TiN
M 3	0,5	48	5,5	3,15	2,5	2,50	164 030	167 030
M 4	0,7	53	8	4,0	3,15	3,30	164 040	167 040
M 5	0,8	58	9	5,0	4,0	4,20	164 050	167 050
M 6	1	66	11	6,3	5,0	5,00	164 060	167 060
M 8	1,25	72	14	8,0	6,3	6,80	164 080	167 080
M 10	1,5	80	16	10,0	8,0	8,50	164 100	167 100
M 12	1,75	89	20	9,0	7,1	10,20	164 120	167 120
M 14	2	95	30	11,2	9,0	12,00	164 140	167 140
M 16	2	102	32	12,5	10,0	14,00	164 160	167 160
M 18	2,5	112	37	14,0	11,2	15,50	164 180	167 180
M 20	2,5	112	37	14,0	11,2	17,50	164 200	167 200

Materiál: HSSE; HSSE TiN
Provedení: broušený závit
Závit: pravý

Material: HSSE; HSSE TiN
Execution: ground thread
Thread: right-hand

Werkstoff: HSSE; HSSE TiN
Ausführung: geschliffenes
Gewinde
Gewinde: rechts

Материал: HSSE; HSSE TiN
Изготовлено: шлифованная
резьба
Резьба: правая

DIN 371

HSSE
code 172 XXX



HSSE TiN
code 175 XXX

Strojní závitníky - broušený
s přímou drážkou

Machine taps - grounded
with straight flute

**Maschinen-Gewinde-
bohrer** - geschliffen mit gerade Nuten

Метчики
- шлифованные с прямой канавкой

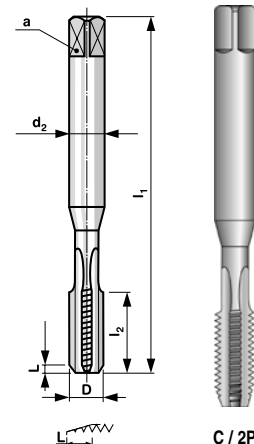

M Metrický závit
Standard metric thread
Metrische Regelgewinde
Метрическая резьба

Lícování: ISO2 (6H) / Tolerance: ISO2 (6H) /
Toleranz: ISO2 (6H) / Подгонка: ISO2 (6H)

D	P	l ₁	l ₂	d ₂	a		code HSSE	code HSSE TiN
M 2	0,4	45	8	2,8	2,1	1,60	172 020	175 020
M 3	0,5	56	11	3,5	2,7	2,50	172 030	175 030
M 4	0,7	63	13	4,5	3,4	3,30	172 040	175 040
M 5	0,8	70	16	6,0	4,9	4,20	172 050	175 050
M 6	1	80	19	6,0	4,9	5,00	172 060	175 060
M 8	1,25	90	22	8,0	6,2	6,30	172 080	175 080
M 10	1,5	100	24	10,0	8,0	8,50	172 100	175 100



**BUČOVICE
TOOLS a.s.**

Materiál: HSSE; HSSE TiN
Provedení: broušený závit
Závit: pravý

Material: HSSE; HSSE TiN
Execution: ground thread
Thread: right-hand

Werkstoff: HSSE; HSSE TiN
Ausführung: geschliffenes
Gewinde
Gewinde: rechts

Материал: HSSE; HSSE TiN
Изготовлено: шлифованная
резьба
Резьба: правая